

Now with
Higher Lift Capacity

New **65 HP** 48.5 kW **Model 5065 E**




Also available with
JDLINK™

...The Next Generation Tractor Technology



Tilt Steering

For operator comfort
adjustable up to 25°
tilt, with lock latch



EQRL

Easy hitching and
usage of implement
through EQRL switches



Smart Brakes

Self adjusting, self equalising,
hydraulically actuated,
oil immersed disc brakes



Hood Lock



Mobile Charging Point with Holder

*Zindagi ka
Best Decision!™*



JOHN DEERE

*Conditions apply

TECHNICAL SPECIFICATION

ENGINE

Type	: 65 HP (48.5 kW), 2400 RPM, 3 cylinder Direct injection, Turbo charged, Rotary F.I.P., liquid cooled with overflow reservoir
Air filter	: Dry type, dual element

TRANSMISSION

Clutch	: Collar Shift
Gear Box	: 9 Forward + 3 Reverse
Speeds	: Forward 2.6 to 31.2 kmph Reverse 3.7 to 24 kmph

BRAKES

	: Self adjusting, Self equalising, Hydraulically actuated, Oil immersed disk brakes
--	---

HYDRAULICS

Maximum Lifting capacity	: 2000 kgf
3 Point linkage	: Category II Automatic depth & draft control (ADDC)

STEERING

Type	: Power
Steering Column	: Tiltable up to 25° with lock latch

FRONT EXLE

Heavy duty variable track

POWER TAKE OFF

Type	: Independent , 6 splines Dual PTO
RPM	: 540 @ 2376 ERPM (Standard) 540 @ 1705 ERPM (Economy)

WHEELS AND TYRES

Front	: 6.5 x 20 (0.17 x 0.51 m), 8 PR
Rear	: 18.4 x 30 (0.47 x 0.76 m), 8 PR

FUEL TANK CAPACITY

: 68 L

ELECTRICAL SYSTEM

88 Ah, 12 volt battery
40 Amp, alternator
12 Volt, 2.5 kW Starter
motor

DIMENSIONS AND WEIGHT

Total weight	: 2290 kg
Wheel base	: 2050 mm
Overall length	: 3535 mm
Overall width	: 1890 mm
Ground clearance	: 0510 mm
Turning radius with brakes	: 3099 mm

OPTIONAL ACCESSORIES*

- Ballast weights • Canopy • Drawbar
- Wagon Hitch • Canopy holder

ADDITIONAL FEATURES

- International look
- Exhaust muffler guard
- Car type engine ON/OFF
- Radiator with over flow reservoir
- Water bottle holder
- Mobile charging point with holder

OPTIONS

- Creeper speeds


FACTORY FITTED OPTIONS

- Roll over protection sturcture (ROPS)
with deluxe seat and seat belt


Model also available in MFWD

Note: Some of the options may not be available in all combinations.
For variants please check with your nearest dealer.

New
65 HP 48.5 kW
Model 5065 E

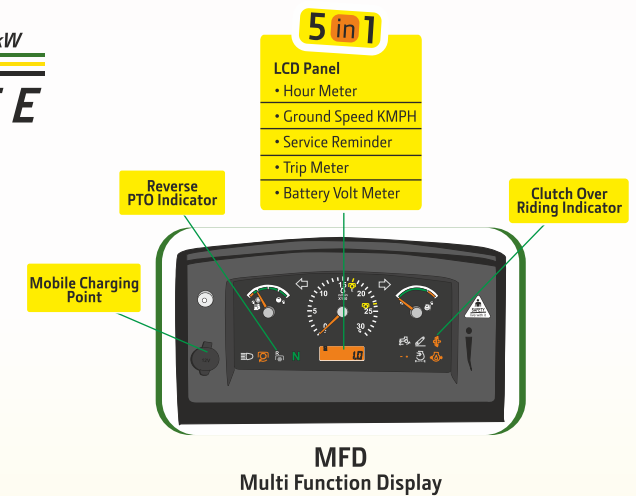

Finger guard
Enhanced safety



Single piece hood opening with gas struts
Ease in opening



PTO shield
Enhanced safety



Go Home Feature
Reach home safely in the dark



Side bar & steps
Climbing up and down the tractor is now easier



High torque reserve
More productivity

John Deere Genuine Parts

**I Economical I Reliable I
I Easily available I**



John Deere India Private Limited

3rd floor, Tower-15, Cybercity, Magarpatta City, Hadapsar,
Pune - 411013. Maharashtra. www.JohnDeere.co.in

For more information, please contact our authorised dealer or nearest area office.



- Tractors • Implements
- Harvesters • Finance



JOHN DEERE